DIVERSIFIED AIR SYSTEMS, INC.

FLO-PAC DUCTED

Portable Air Cleaner

- Collects dust, fumes, mist, smoke, and odors
- Plug and play unit, total self-contained, filters, direct drive motor & blower
- Nominal 2000 CFM with 8" Collar, 1250 CFM with 6" Collar, 1.5 HP Motor, 120/1/60




- Recirculates clean air, which eliminates the need for expensive exhaust
- Flexible filter combinations, easy to use & maintain
- Standard 95% @ 1 micron high efficiency media filter with optional 99.97 HEPA and a refillable adsorption module

MAXFLO PORTABLE DUCTED AIR CLEANER

Diversified Air Systems, Inc. now offers an easy to use portable ducted air cleaner. The MAXFLO-PAC ducted is a totally self-contained portable filtration unit. Standard filtration consist of aluminum mesh pre-filter followed by a MERV 14 (95% at 1 micron) metal box filter. Separate access door allows for easy access to filters. Direct drive non-sparking blower wheel. On/off switch and wiring are all located out of the airstream.

OUTSTANDING STANDARD MAXFLO PORTABLE AIR CLEANER FEATURES

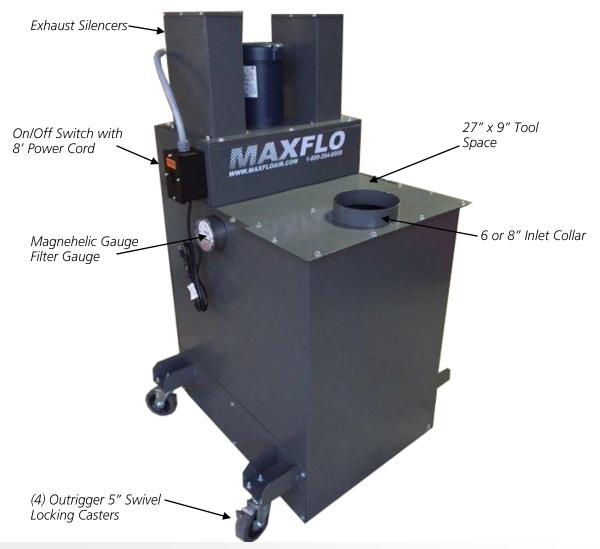

TYPICAL APPLICATIONS FOR THE MAXFLO PAC DUCTED PORTABLE AIR CLEANER

• WELDING • GRINDING • SANDING • DUST • POWDERS • MIST & SMOKE, ETC.

Made in USA
1 YEAR LIMITED WARRANTY

CALL TODAY: 800-264-8958

OUTSTANDING MAXFLO PAC SERIES FEATURES




Top Exhaust Silencers

2" Aluminum Mesh or 1" Polyester Pad

Optional: Refillable Absorption Modules and/or HEPA

Fiberglass 95% MERV 14 Main Filter (58 sq. ft.)

· 1" Aluminum Mesh or Polyester pad



SPECIFICATIONS

Dimensions: 38" W x 34" D x 60" H Inlet Collar: Standard 6" or 8" Collar Base from Floor: 38"

Electrical: 1.5 HP Motor, 120/1/60
Direct Drive Motor Non-Sparking Blower Wheel

Motor Mounted Out of Airstream Airflow: Nominal 2000 CFM w/ 8" Collar 1250 CFM w/ 6" Collar

Weight: 475 lbs.

Noise: 73 DBA Nominal

Construction: 14 Gauge Cabinet Color: Powder Coated Gray

OPTIONAL FEATURES

- Forklift Rails, No Casters
- Exhaust Dampers
- Variable Frequency Drives
- Inlet Collar Size
- Top, Front or Side Inlet Collars
- HEPA Filtration
- Absorption Modules
- 3 Phase Electric Motor

MAXFLO-PAC STANDARD FILTER ARRANGEMENT

- (1) 1" Aluminum Mesh
- (1) 95% @ 1 Micron (MERV 14) Fiberglass
 - Box Filter, 58 sq. ft.
- (1) 2" Aluminum Mesh After Filter

Note: Specifications listed above may be modified to suit application. contact D.A.S. or representative for information.

Diversified Air Systems, Inc.

10801 Electron Drive, Louisville, Kentucky 40299

Toll free: (800) 264-8958

Tel.: (502) 267-0333 • Fax: (502) 267-4241

Website: www.diversair.com • email: info@diversair.com