



KEY FEATURES

 Collects paint fumes and solvents safely at the hood

MAXFLO-PFC

- Plug and play unit, total self-contained with MAXFLO fume arm
- 1.5HP motor with direct drive blower wheel, 120/1/60, low noise level
- Nominal 1500 CFM with 8" x 10" MAXFLO Fume Arm
- Nominal 1000 CFM with 6" x 10" MAXFLO **Fume Arm**
- Ventless, recirculates clean air, which eliminates the need for expensive exhaust
- TEFC Motor, electric out of airstream, non sparking blower wheel
- Flexible filter combinations, easy to use & maintain
- · Standard high efficiency media filters with refillable adsorption module

Superior technology generating substantial operating savings



ONE YEAR LIMITED WARRANTY



MAXFLO IS A TRADEMARK OF **DIVERSIFIED AIR SYSTEMS**

MAXFLO PFC

Diversified Air Systems, Inc. now offers an easy to use ventless portable fume/paint collector. The MAXFLO-PFC is a totally self-contained portable filtration unit. Standard filtration consists of polyester pre-filters followed by a MERV (95% at 1 micron) metal box filter with final refillable charcoal module. Separate full width access door allows for easy access to filters. The motor is mounted out of the air stream with direct drive non-sparking blower wheel. On/off switch and wiring are all located out of the air stream. Just roll the unit to your job, plug it in and turn it on. Captures fumes at the source safely with a MAXFLO source capture fume arm.

TYPICAL APPLICATIONS FOR THE MAXFLO PFC

- **■** Paint Overspray
- **VOC Fumes**
- Hazardous Fumes
- Odors


- **Epoxy Overspray**
- Aerosol Sprays
- Mist

OUTSTANDING STANDARD MAXFLO PFC FEATURES





CALL TODAY: 800.264.8958
MAXFLO is a trademark of Diversified Air Systems

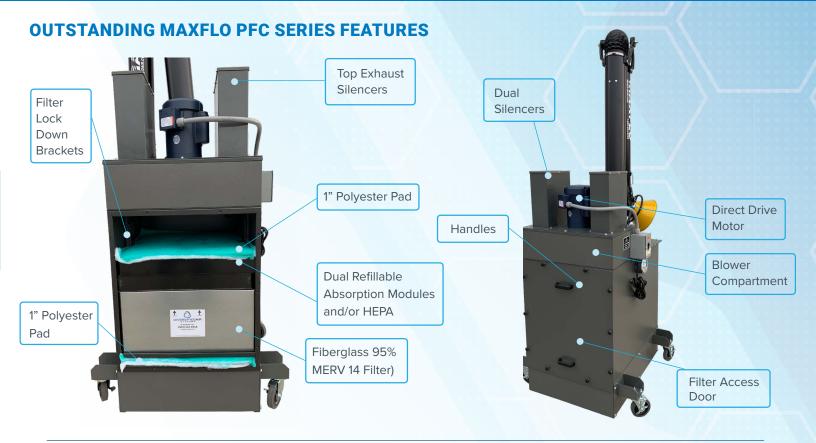

SPECIFICATIONS

Dimensions	38" W x 34" D x 60" H
Fume Arm	Standard 6" Diameter x 10' Length
Fume Arm Base from Floor	38"
Electrical	1.5 HP Motor, 120/1/60
Blower	Composite Wheel
Motor	TEFL Direct Drive
Airflow	Nominal 1000 CFM w/ 6"x 10' Fume Arm 1500 CFM w/ 8" x 10' Fume Arm
Weight	550lbs
Noise	73 DBA Nominal
Construction	14 Gauge Cabinet
Color	Powder Coated Dark Gray

OPTIONAL FEATURES

- 3 Phase Motor
- Exhaust Dampers
- Variable Frequency Drives
- Fume Arm Diameters: 4", 5", 6" & 8"
- Fume Arm Lengths: 7', 10', & 14'
- Dual Arms
- HEPA Filtration

MAXFLO PFC STANDARD FILTER ARRANGEMENT

- (1) 1" Polyester Pre Filter
- (1) 95% @ 1 Micron (MERV 14) Fiberglass Box Filter, 58 sq. ft.
- (2) Adsorption Modules, 26 lbs. each. Refillable, 6" Total Bed Depth, 100% Fill, 52 lbs. Activated Carbon Included
- (1) 1" Polyester Pad After Filter

Diversified Air Systems, Inc

5900 Concord Avenue Crestwood KY 40014

Toll free: 800.264.8958 // Phone: 502.267.0333 // Fax: 502.267.4241

www.maxfloair.com // info@maxfloair.com

Note: Specifications listed above may be modified to suit application. Contact D.A.S. or representative for information.

Continuous product improvement is a policy of D.A.S. Inc. Product features and specifications may be modified without prior notice.

