


MAXFLO D-70 Series: Industrial Air Cleaners

KEY FEATURES

- Economical Way to Improve Air Quality 65% to 85%
- Helps Meet or Exceed OSHA Standards
- Recirculates Clean Air, Eliminating the Need for Expensive Make-up Air
- Reduces Housekeeping Costs and Improves Productivity
- Minimal Installation Required, Ceiling or Side Wall Mounted
- Ships Fully Assembled, 7000 to 7600 CFM Range

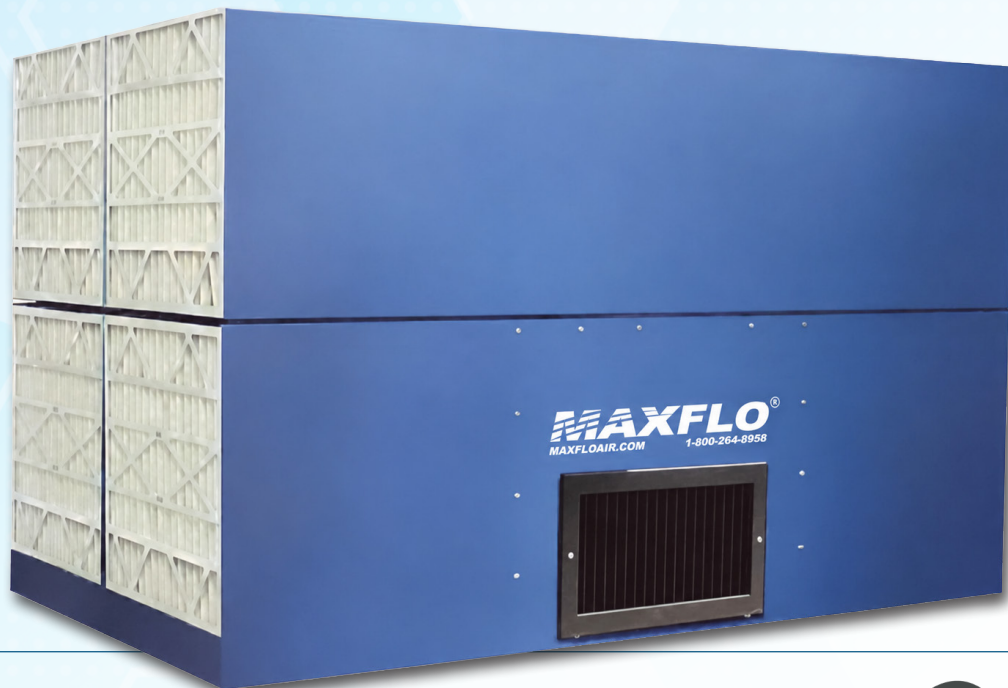

*Superior technology generating
substantial operating savings*



ONE YEAR
LIMITED WARRANTY




DIVERSIFIEDAIR
SYSTEMS

MAXFLO IS A TRADEMARK OF
DIVERSIFIED AIR SYSTEMS

TYPICAL APPLICATIONS FOR THE MAXFLO AMBIENT AIR CLEANERS

- Welding Smoke
- Sanding Dust
- Coolant Mist
- Odors
- Grinding Dust
- Oil Smoke
- Powders
- Etc....

OUTSTANDING MAXFLO D-SERIES FEATURES

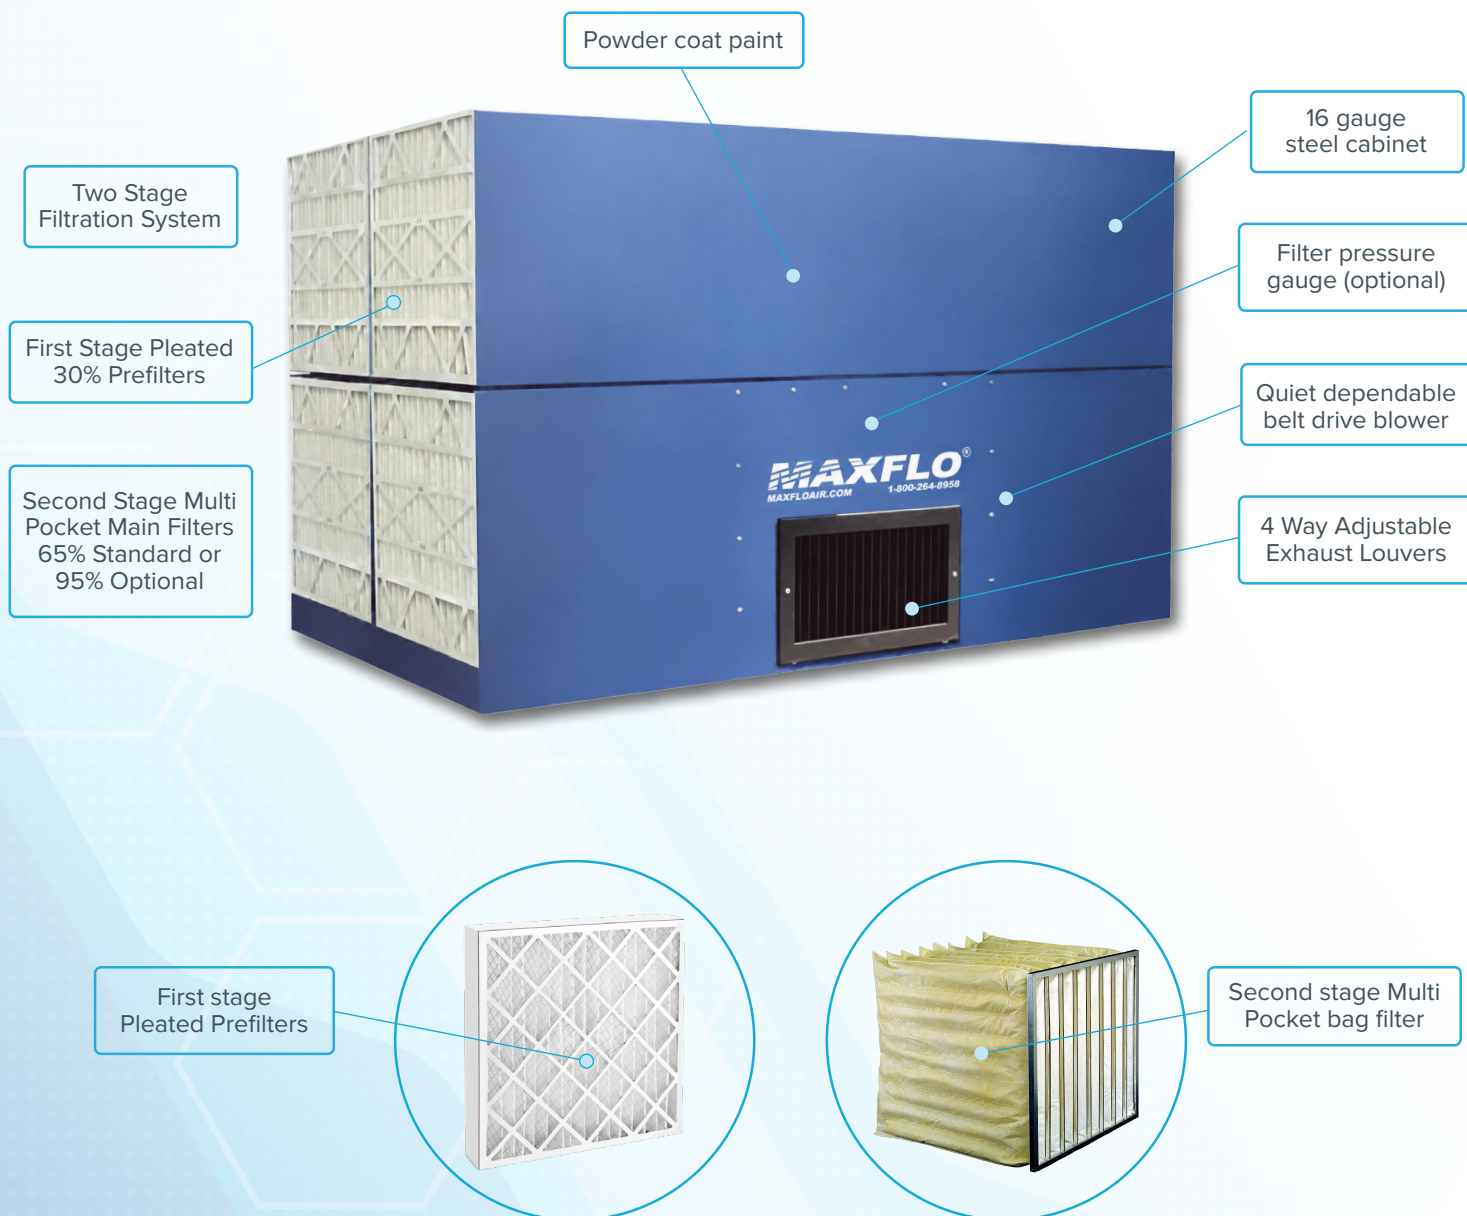


ONE YEAR
LIMITED WARRANTY

CALL TODAY: 800.264.8958

MAXFLO is a trademark of Diversified Air Systems


OUTSTANDING MAXFLO D-SERIES FEATURES

16 gauge steel cabinet finished with a dark blue chemical resistant polyurethane paint, four way individually adjustable blades, and a single speed, belt driven motor wired to junction box on unit.

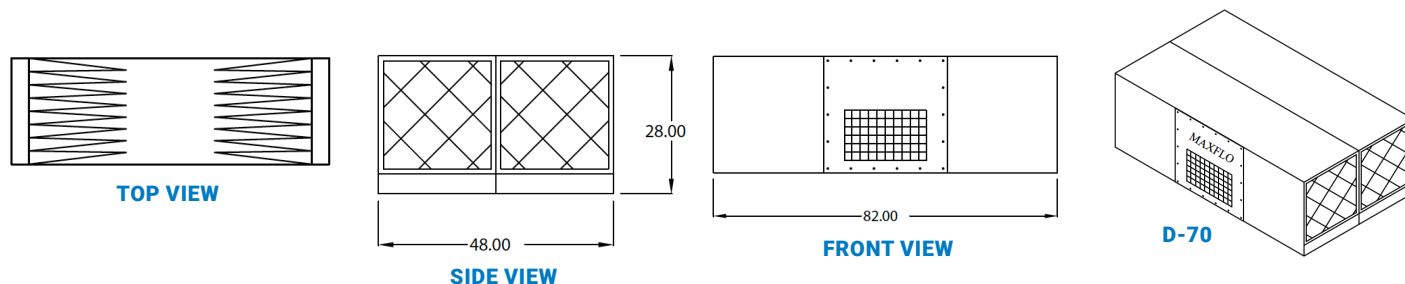

Specifications				
Airflow	D-70	7000CFM	Prefilters: (Depends on config.)	(4) 4" Pleated Std. (4) Aluminum Mesh, Opt.
	D-75	7500CFM		
	D-76	7600CFM		
Electrical	5HP 208-230/460/3, 14.0-13.0/6.5 Amps		Main Filters: (Depends on config.)	(4) 22" 8 pockets 65%, Std. (4) 22" 8 pocket 95%, Opt.
Warranty	3 Years on all parts except filters		Noise:	74 dBA
Options	Filter replacement gauge, mounting bracket, silencer			

MAXFLO D-30 SERIES OPTIONAL MULTIPLE CABINET CONFIGURATION

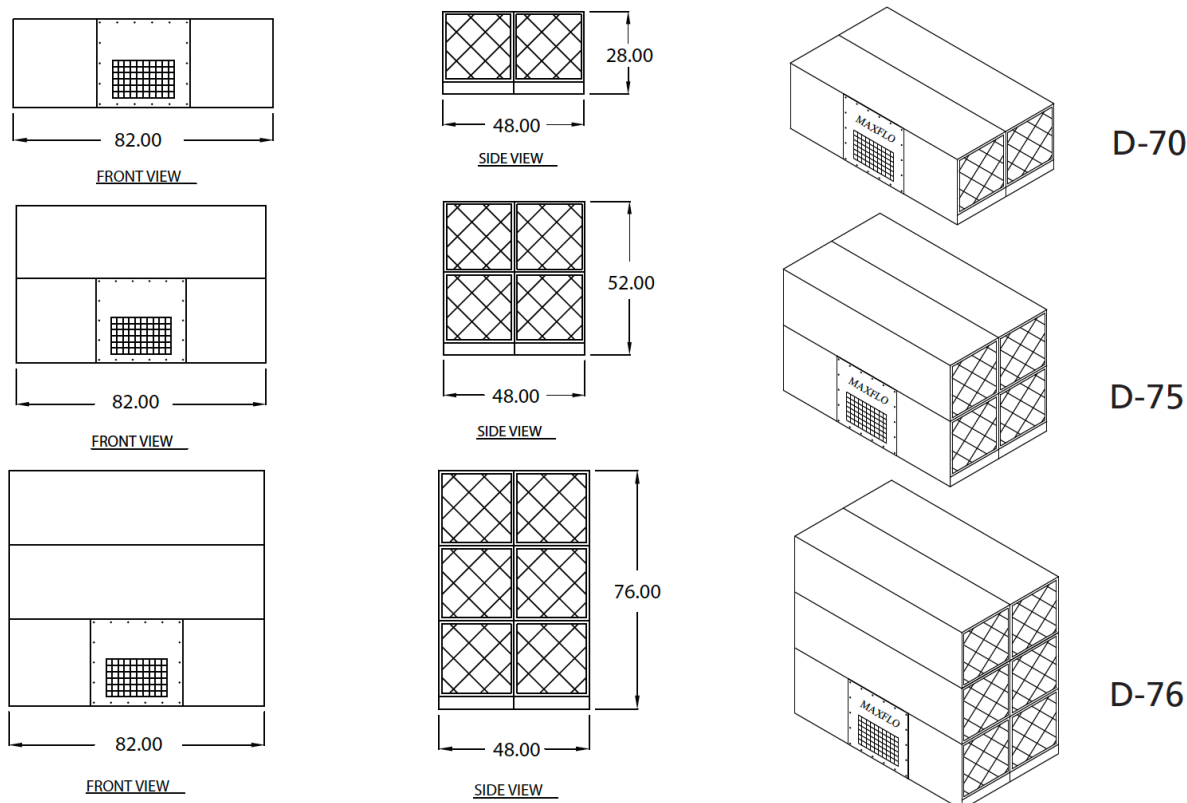

ONE YEAR
LIMITED WARRANTY


CALL TODAY: 800.264.8958

MAXFLO is a trademark of Diversified Air Systems

FREE HANGING UNDUCTED AIR CLEANING SYSTEMS

Unducted air cleaning systems consist of one or more interior air cleaners positioned in the overhead plant space to create a planned air circulation airflow pattern. This method effectively cleans the overall ambient air. Unducted systems rely on constant cleaning and mixing of the entire area volume to remove contaminants. Unducted systems never remove 100% of the contaminants. The objective of this method is to achieve a substantial contaminant reduction at steady-state levels. Unducted systems will typically provide an estimated 65 to 85% contaminate reduction. The percentage reduction is base on the number of air changes provided by the unducted air cleaning system.

Recommended Air Flow Patterns

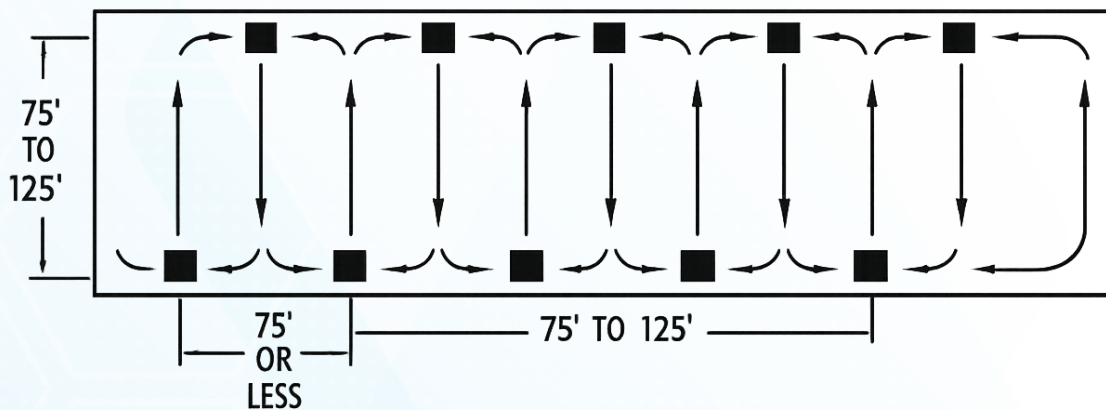

Cross-Bay Patterns

Diversified Air Systems, Inc

5900 Concord Avenue, Crestwood KY, 40014

Toll free: 800.264.8958 // Phone: 502.267.0333 // Fax: 502.267.4241

www.maxfloair.com // info@maxfloair.com

Note: Specifications listed above may be modified to suit application. Contact D.A.S. or representative for information.

Continuous product improvement is a policy of D.A.S. Inc. Product features and specifications may be modified without prior notice.



**ONE YEAR
LIMITED WARRANTY**

CALL TODAY: 800.264.8958

MAXFLO is a trademark of Diversified Air Systems