

MAXFLO[™] D-30: Industrial Air Cleaners

KEY FEATURES

- Economical way to improve air quality 65% to 85%
- Helps meet or exceed OSHA standards
- Recirculates clean air, eliminating the need for expensive make-up air
- Reduces housekeeping costs and improves productivity
- Minimal installation required, ceiling or side wall mounted
- Ships fully assembled, 3000 to 3500 CFM



*Superior technology generating
substantial operating savings*



ONE-YEAR
LIMITED WARRANTY



DIVERSIFIEDAIR
SYSTEMS

MAXFLO IS A TRADEMARK OF
DIVERSIFIED AIR SYSTEMS

TYPICAL APPLICATIONS FOR THE MAXFLO AMBIENT AIR CLEANERS

- Welding Smoke
- Sanding Dust
- Coolant Mist
- Odors
- Grinding Dust
- Oil Smoke
- Powders

OUTSTANDING MAXFLO D-SERIES FEATURES



Made in USA | 1 YEAR WARRANTY

Ideal for automotive industry, welding shops, vocational schools, training facilities, laboratories, woodworking shops, metal transforming industries, batching and powder processes.




**ONE-YEAR
LIMITED WARRANTY**

CALL TODAY: 1-800-264-8958

MAXFLO is a trademark of Diversified Air Systems







MAXFLO D-30 SERIES SPECIFICATIONS

16 Gauge steel cabinet finished with a dark blue chemical-resistant polyurethane paint, direct-drive, two-speed motor with 12', 16 gauge power cord and four-way individually adjustable blades.

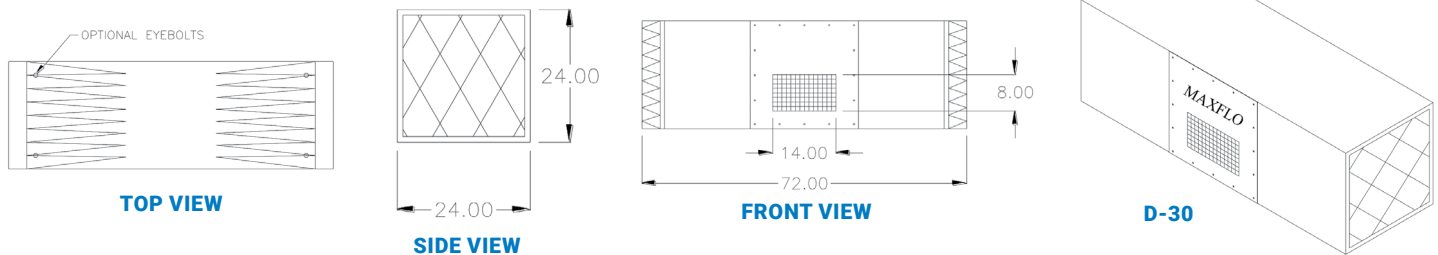

Specifications			
Airflow	3000 CFM (High)	Prefilters: (Depends on config.)	(4) 4" Pleated Std.
	1600 CFM (Low)		(4) Aluminum Mesh, Opt.
Electrical	3/4 HP 115V, 8.5 Amps, 950 Watts, Std.	Main Filters: (Depends on config.)	(4) 22" 8 pocket 65%, Std.
	3/4 HP 208-230V, Opt.		(4) 22" 8 pocket 95%, Opt.
Warranty	1 Year Limited Warranty	After Filters	(2) 2" charcoal, Opt.
		Noise:	62 dBA
Options	2 HP motor (3500 CFM) Filter replacement gauge, Mounting bracket, Silencer.		

MAXFLO D-30 SERIES OPTIONAL MULTIPLE CABINET CONFIGURATION

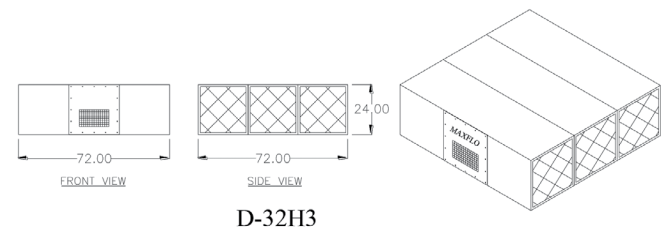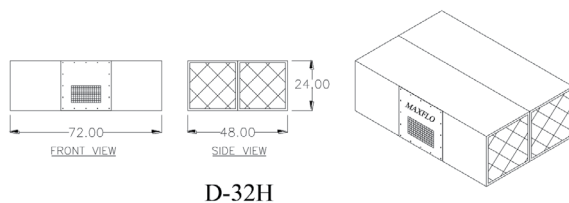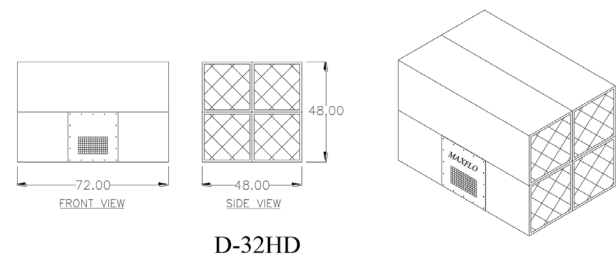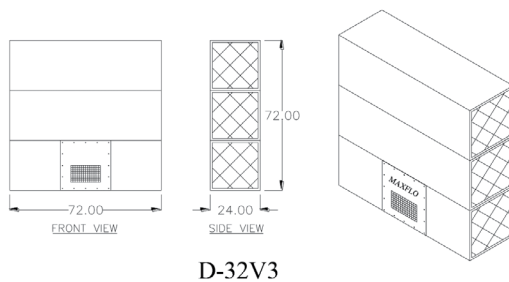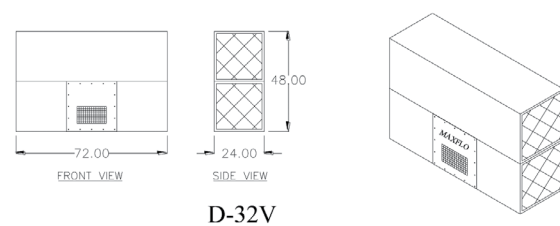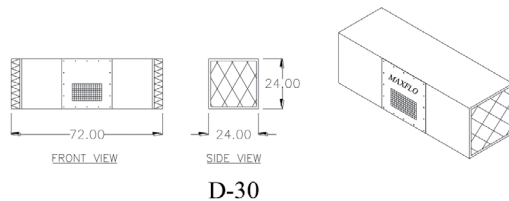

**ONE-YEAR
LIMITED WARRANTY**

CALL TODAY: 1-800-264-8958


MAXFLO is a trademark of Diversified Air Systems

FREE HANGING UNDUCTED AIR CLEANING SYSTEMS

Unducted air cleaning systems consist of one or more interior air cleaners positioned in the overhead plant space to create a planned air circulation airflow pattern. This method effectively cleans the overall ambient air. Unducted systems rely on constant cleaning and mixing of the entire area volume to remove contaminants. Unducted systems never remove 100% of the contaminants.

The objective of this method is to achieve a substantial contaminant reduction at steady-state levels. Unducted systems will typically provide an estimated 65 to 85% contaminant reduction. The percentage reduction is based on the number of air changes provided by the unducted air cleaning system.

Recommended Air Flow Patterns

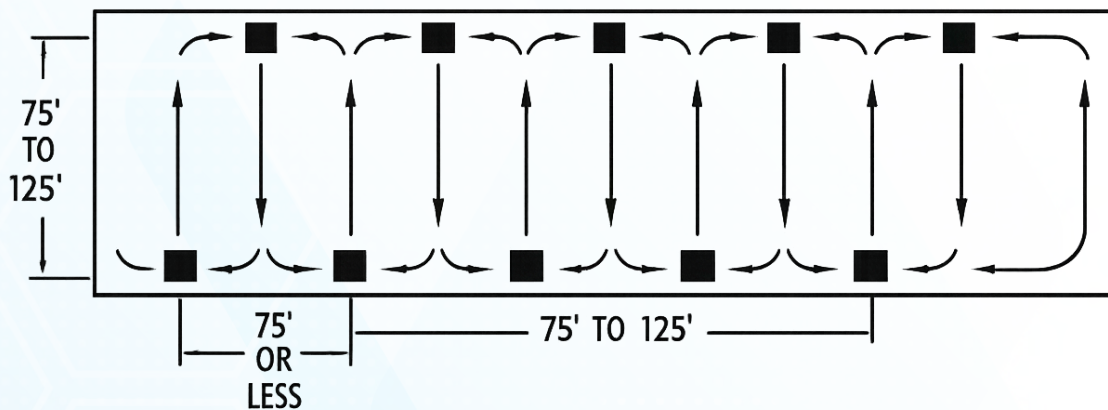

Cross-Bay Patterns

Diversified Air Systems, Inc.

5900 Concord Avenue, Crestwood KY 40014

Toll free: 800-264-8958 // Phone: 502-267-0333 // Fax: 502-267-4241

www.maxfloair.com // info@maxfloair.com

Note: Specifications listed above may be modified to suit application. Contact D.A.S. or representative for information.

Continuous product improvement is a policy of D.A.S. Inc. Product features and specifications may be modified without prior notice.



**ONE-YEAR
LIMITED WARRANTY**

CALL TODAY: 1-800-264-8958

MAXFLO is a trademark of Diversified Air Systems