

DIVERSIFIED AIR SYSTEMS, INC.

MAXFLO-DB™

Portable Downdraft Booth

- **Typical applications: Welding, Grinding, Sanding, Dust, Mist, Smoke, Powders, Lint, Fibers etc.**
- **Ships fully assembled, 48" wide x 24" deep work surfaces, optional 1' modular table extensions**
- **Plug and play unit, total self-contained downdraft booth**



- **LED light mounted out of air stream**
- **Ventless, recirculates clean air, which eliminates the need for expensive exhaust**
- **High efficiency media filters with optional refillable adsorption module and 99.97% HEPA Filter**

Superior technology generating substantial operating savings

MAXFLO PORTABLE DOWNDRAFT BOOTH

Diversified Air Systems, Inc. now offers an easy to use portable downdraft booth. The MAXFLO-DB is a totally self-contained portable filtration unit. Standard filtration consist of an aluminum mesh pre-filter followed by a MERV 14 (95% at 1 micron) box filter. Separate access door allows for easy access to filters. The motor is mounted out of the air stream with direct drive spark resistant blower wheel. LED light, on/off switch and wiring are all located out of the airstream. Just roll the unit to your job, plug it in and turn it on.

OUTSTANDING MAXFLO FUME BOOTH FEATURES & OPTIONS

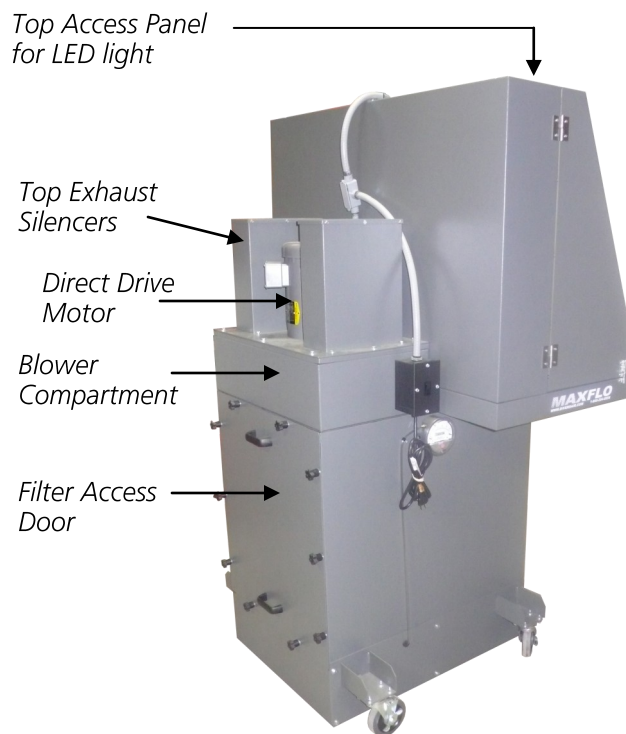
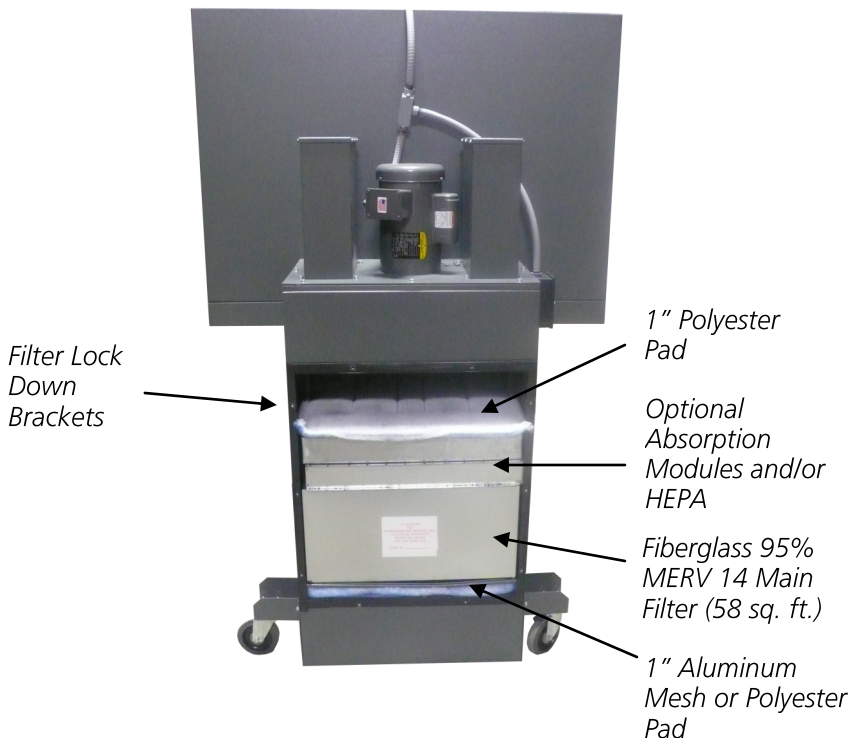


TYPICAL APPLICATION FOR THE MAXFLO DOWNDRAFT BOOTH

- Welding
- Grinding
- Sanding
- Dust
- Powders
- Mist, Smoke, etc...

Made in USA
1 YEAR LIMITED WARRANTY

CALL TODAY : 800-264-8958

OUTSTANDING STANDARD MAXFLO DB FEATURES**SPECIFICATIONS**

Dimensions: 48" W x 39" D x 74" H
 Working Table Height: 41"
 Working Surface: 48" Width x 24" Depth
 Electrical: 1.5 HP Motor, 120/1/60
 Direct Drive Motor with Plastic Blower Wheel
 Motor Mounted Out of Airstream
 CFM: 1900 CFM Nominal
 Downdraft Velocity: 250 FPM Nominal
 Weight: 540 lbs.
 Max Table Load: 300 PSF
 Noise: 73 DBA Nominal
 Construction: 14 Gauge Cabinet
 Color: Powder Coated Gray

OPTIONAL FEATURES

- Fluorescent Light
- Polyester Filters
- Steel Bar Grate
- Custom Size Booths
- HEPA Filtration
- Variable Frequency Drives
- Absorption Modules
- Modular 1" Square Table Extensions
- Outtrigger (4) 5" Swivel & Locking Casters
- Exhaust Dampers

MAXFLO-FB STANDARD FILTER ARRANGEMENT

- (1) - 1" Aluminum Mesh Prefilter
- (1) - 95% @ 1 Micron (MERV 14) Fiberglass Box Filter, 58 sq. ft.

Note: Specifications listed above may be modified to suit application. contact D.A.S. or representative for information.

Diversified Air Systems, Inc.

10801 Electron Drive, Louisville, Kentucky 40299

Toll free: **(800) 264-8958**

Tel.: **(502) 267-0333** • Fax: **(502) 267-4241**

Website: www.diversair.com • email: info@diversair.com