


MAXFLO-PAC: Ducted Portable Air Cleaner

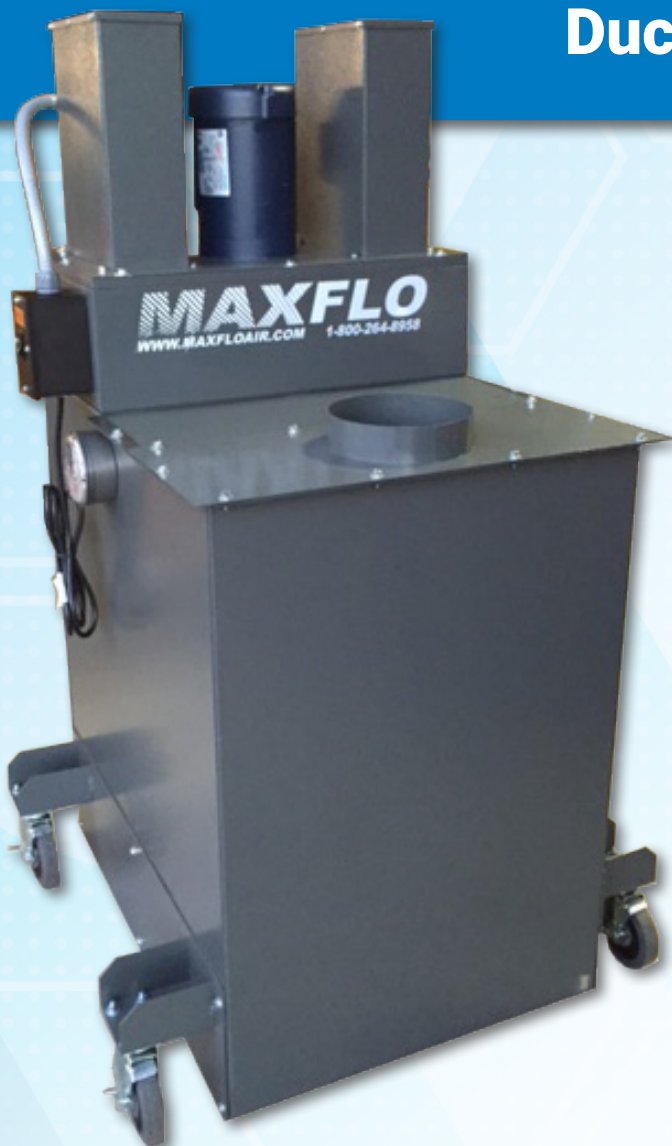

KEY FEATURES

- Collects dust, fumes, mist, smoke, and odors
- Plug and play unit, total self-contained, filters, direct drive motor & blower
- Nominal 2000 CFM with 8" Collar, 1250 CFM with 6" Collar, 1.5 HP Motor, 120/1/60
- Recirculates clean air, which eliminates the need for expensive exhaust
- Flexible filter combinations, easy to use & maintain
- Standard 95% @ 1 micron high efficiency media filter with optional 99.97 HEPA and a refillable adsorption module

*Superior technology generating
substantial operating savings*



ONE YEAR
LIMITED WARRANTY



DIVERSIFIEDAIR
SYSTEMS

MAXFLO IS A TRADEMARK OF
DIVERSIFIED AIR SYSTEMS

MAXFLO PORTABLE DUCTED AIR CLEANER

Diversified Air Systems, Inc. now offers an easy to use portable air cleaner. The MAXFLO-PAC is a totally self-contained portable filtration unit. Standard filtration consist of 1" polyester ring pad pre-filter then a MERV 14 (95% at 1 micron) metal box filter followed by a 1" polyester ring pad. Separate access door allows for easy access to filters. Direct drive blower wheel. On/off switch with 8' power cord. Just roll the unit to your job, plug it in and turn it on. Captures fumes at the source with a Maxflo source capture fume arm.

TYPICAL APPLICATIONS FOR THE MAXFLO PAC DUCTED PORTABLE AIR CLEANER

- Welding
- Sanding
- Powders
- Grinding
- Dust
- Mist & Smoke, etc.

OUTSTANDING STANDARD MAXFLO PORTABLE AIR CLEANER FEATURES




ONE YEAR
LIMITED WARRANTY

CALL TODAY: 800.264.8958

MAXFLO is a trademark of Diversified Air Systems

OUTSTANDING MAXFLO PAC SERIES FEATURES

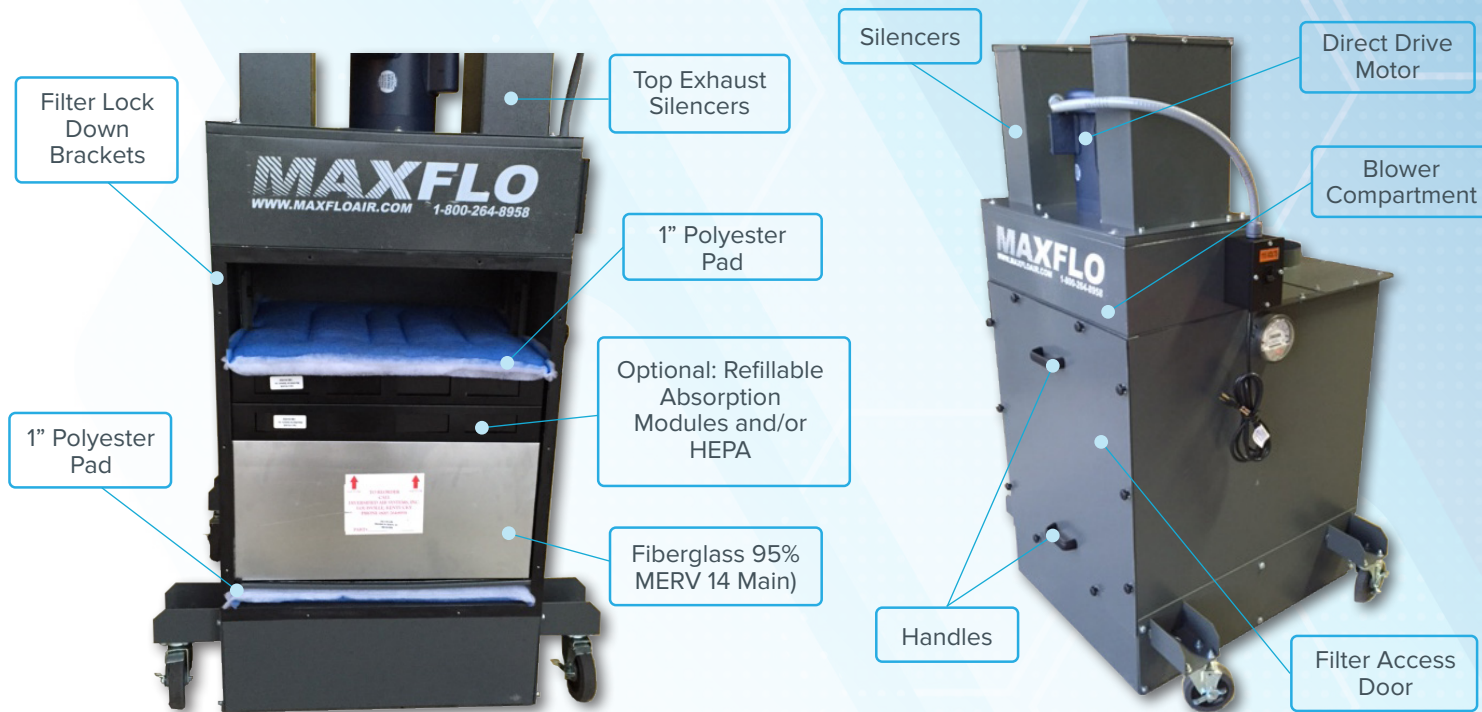

SPECIFICATIONS

Dimensions	38" W x 34" D x 60" H
Inlet Collar	Standard 6" or 8"
Collar Base from Floor	38"
Electrical	1.5 HP Motor, 120/1/60
Direct Drive Motor Non-Sparking Blower Wheel	
Motor Mounted Out of Airstream	
Airflow	Nominal 2000 CFM with 8" collar 1250 CFM with 6" Collar
Downdraft Velocity	200 FPM Nominal
Weight	475lbs
Noise	73 DBA Nominal
Construction	14 Gauge Cabinet
Color	Powder Coated Gray

OPTIONAL FEATURES

- Forklift Rails, No Casters
- Variable Frequency Drives
- Inlet Collar Size
- Top, Front or Side Inlet Collars
- HEPA Filtration
- Absorption Modules
- 3 Phase Electric Motor
- Exhaust Dampers

MAXFLO-PAC STANDARD FILTER

- (1) 1" Polyester Pad
- (1) 95% @ 1 Micron (MERV 14) Fiberglass Box
- Filter, 58 sq. ft.
- (1) 1" Polyester Pad

Diversified Air Systems, Inc

5900 Concord Avenue Crestwood KY 40014
Toll free: 800.264.8958 // Phone: 502.267.0333 // Fax: 502.267.4241
www.maxfloair.com // info@maxfloair.com

Note: Specifications listed above may be modified to suit application. Contact D.A.S. or representative for information.

Continuous product improvement is a policy of D.A.S. Inc. Product features and specifications may be modified without prior notice.



**ONE YEAR
LIMITED WARRANTY**

CALL TODAY: 800.264.8958

MAXFLO is a trademark of Diversified Air Systems