

MAXFLO[™] D-25: Industrial Air Cleaners

KEY FEATURES

- Economical way to improve air quality 65% to 85%
- Helps meet or exceed OSHA standards
- Recirculates clean air, eliminating the need for expensive make-up air
- Low noise level, direct-drive blower
- Reduces housekeeping costs and improves productivity
- Minimal installation required, ceiling or side wall mounted
- Ships fully assembled, 2500 CFM



*Superior technology generating
substantial operating savings*



ONE-YEAR
LIMITED WARRANTY



DIVERSIFIEDAIR
SYSTEMS

MAXFLO IS A TRADEMARK OF
DIVERSIFIED AIR SYSTEMS


MAXFLO AMBIENT AIR CLEANERS

Ideal for automotive industry, welding shops, vocational schools, training facilities, laboratories, woodworking shops, metal transforming industries, batching and powder processes.

TYPICAL APPLICATIONS FOR THE MAXFLO AMBIENT AIR CLEANERS

- Welding Smoke
- Grinding Dust
- Sanding Dust
- Oil Smoke
- Coolant Mist
- Powders
- Odors

OUTSTANDING MAXFLO D-SERIES FEATURES

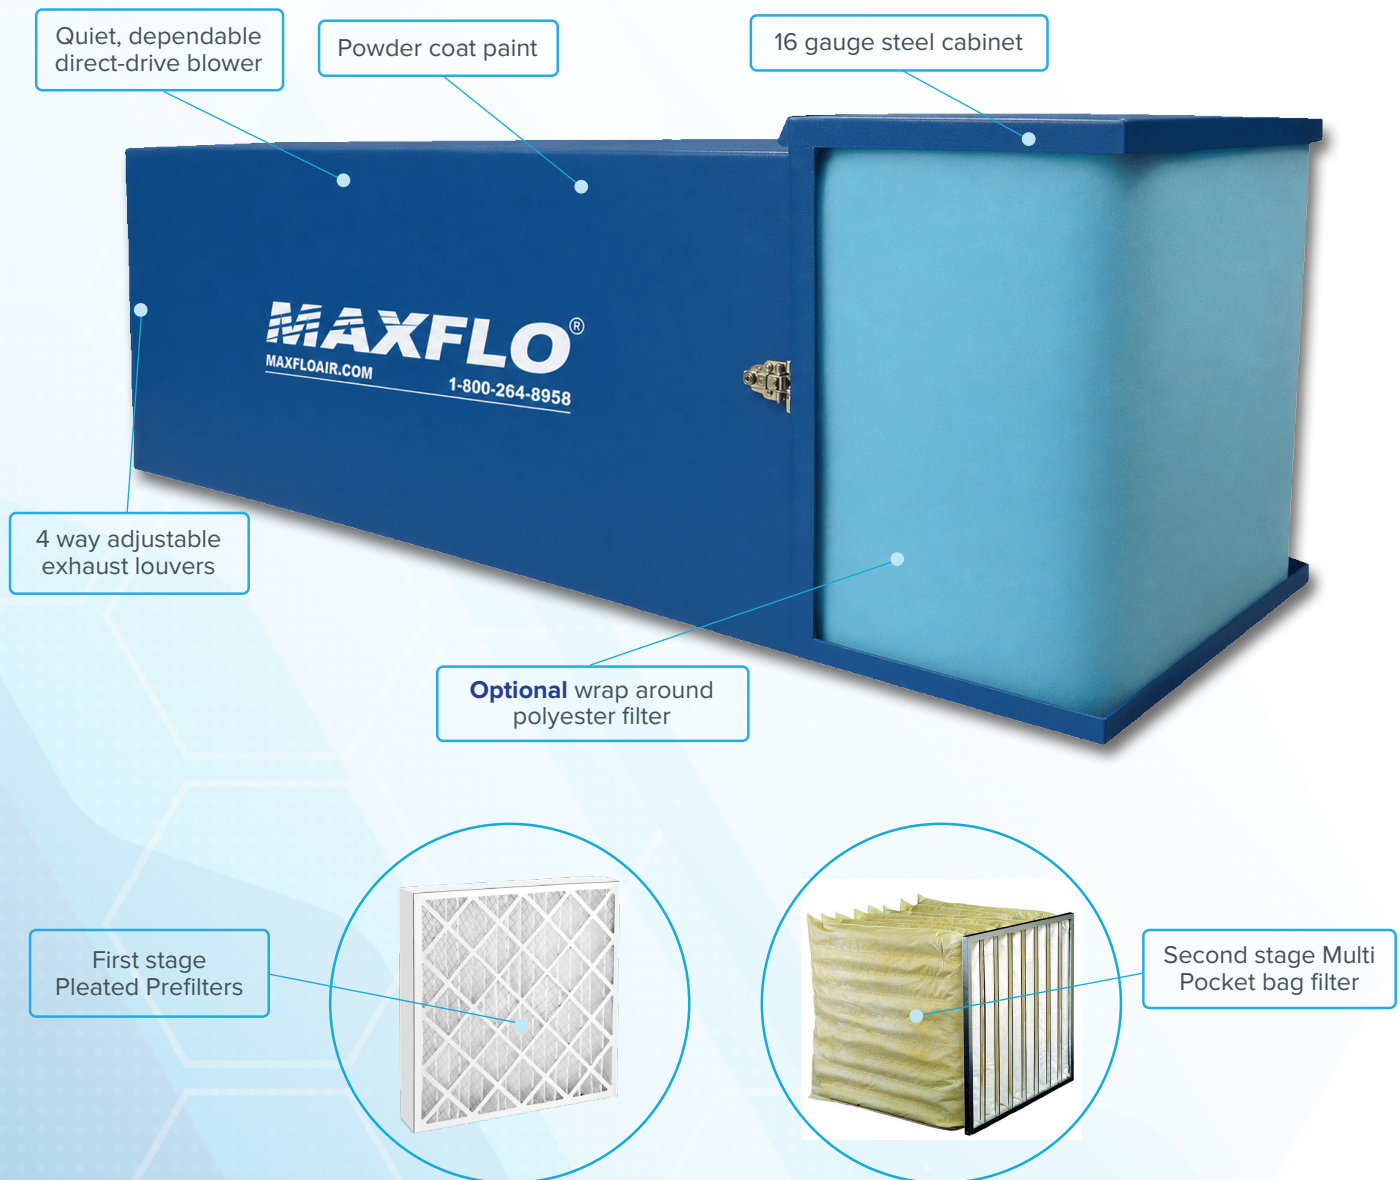


**ONE-YEAR
LIMITED WARRANTY**

CALL TODAY: 1-800-264-8958


MAXFLO is a trademark of Diversified Air Systems

MAXFLO AMBIENT AIR CLEANERS

16 gauge steel cabinet finished with a dark blue chemical-resistant polyurethane paint, four-way individually adjustable blades and a variable-speed, direct-drive motor with power cord.

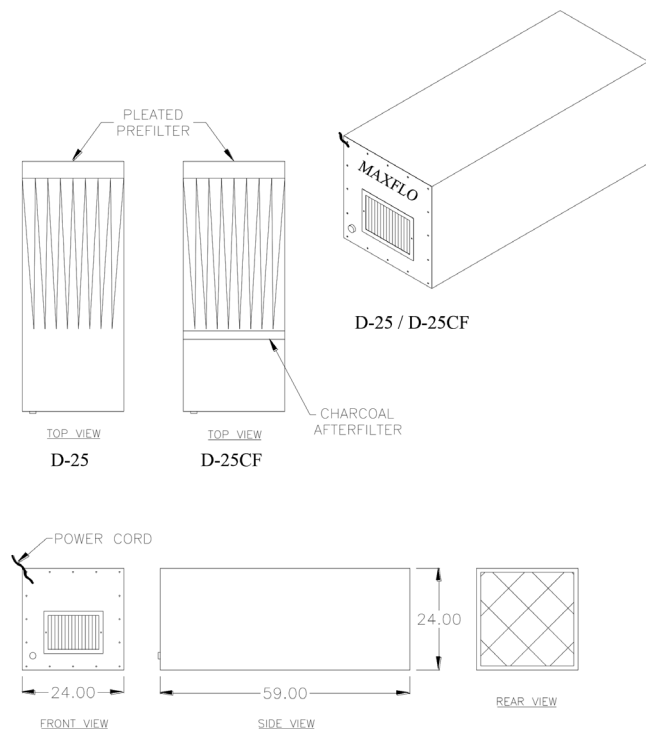

MAXFLO D-25 SERIES OPTIONAL MULTIPLE CABINET CONFIGURATION

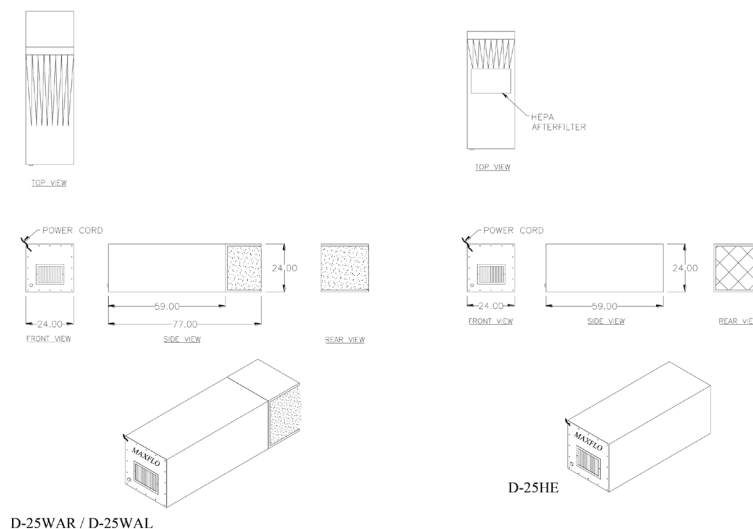

SPECIFICATIONS

Airflow	2500 CFM (High)	Prefilters	(1) 4" Pleated Std. (1) Aluminum Mesh, Opt.
Electrical	3/4 HP 115/60/1, 10.2 Amps 3/4 HP 230/1 with junction box	Main Filters: (Depends on model)	(1) 36" 8 pocket 65% (1) 15" 8 pocket 95% (1) 36" 8 pocket 95%, Opt. (1) 15" 12 pocket 95%, Opt.
		After Filters (Depends on model)	(1) 2" charcoal (1) 12" 99.97% HEPA (1) 2" Mist eliminator, Opt.
Warranty	3 years on all parts except filters	Noise	62 dBA
Options	Filter change gauge, Silencer, Mounting bracket, Eyebolts, Wrap-a-round filter		



**ONE-YEAR
LIMITED WARRANTY**


CALL TODAY: 1-800-264-8958

MAXFLO is a trademark of Diversified Air Systems

FREE HANGING UNDUCTED AIR CLEANING SYSTEMS

Unducted air cleaning systems consist of one or more interior air cleaners positioned in the overhead plant space to create a planned air circulation airflow pattern. This method effectively cleans the overall ambient air. Unducted systems rely on constant cleaning and mixing of the entire area volume to remove contaminants. Unducted systems never remove 100% of the contaminants. The objective of this method is to achieve a substantial contaminant reduction at steady-state levels. Unducted systems will typically provide an estimated 65 to 85% contaminant reduction. The percentage reduction is based on the number of air changes provided by the unducted air cleaning system.

Recommended Air Flow Patterns

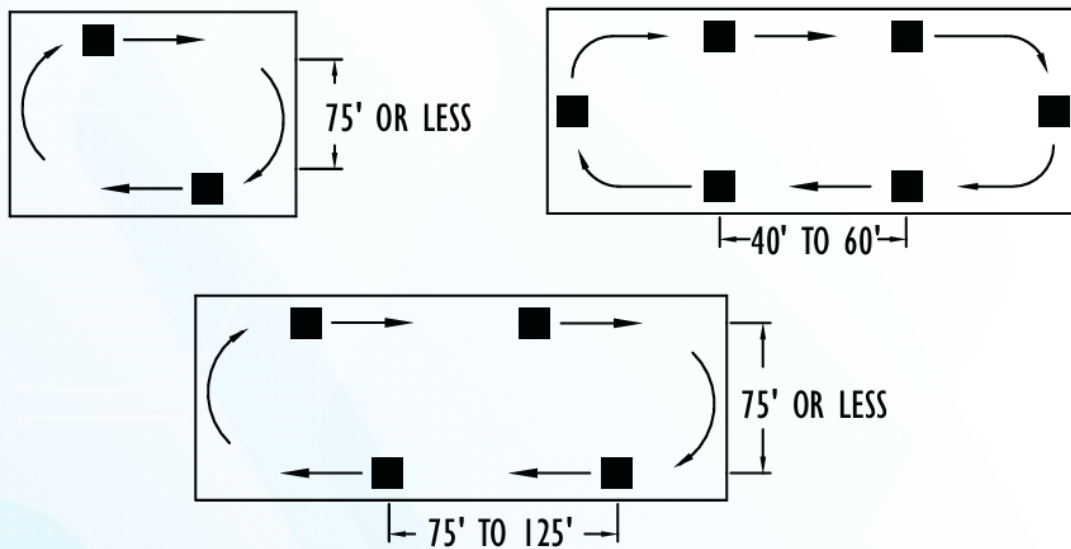

Circular Air Patterns

Diversified Air Systems, Inc.

5900 Concord Avenue, Crestwood KY 40014

Toll free: 800-264-8958 // Phone: 502-267-0333 // Fax: 502-267-4241

www.maxfloair.com // info@maxfloair.com

Note: Specifications listed above may be modified to suit application. Contact D.A.S. or representative for information.

Continuous product improvement is a policy of D.A.S. Inc. Product features and specifications may be modified without prior notice.



**ONE-YEAR
LIMITED WARRANTY**

CALL TODAY: 1-800-264-8958

MAXFLO is a trademark of Diversified Air Systems